

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 7 TOWNSHIP 16 RANGE 3

DATE: 9-22-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison Monument

METHOD OF ESTABLISHMENT: County: 7-17-00



IN. S.P.C. E ZONE NAD '83

NAME: 16030705

N: 510565.2358(m)

E: 50488.0409(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

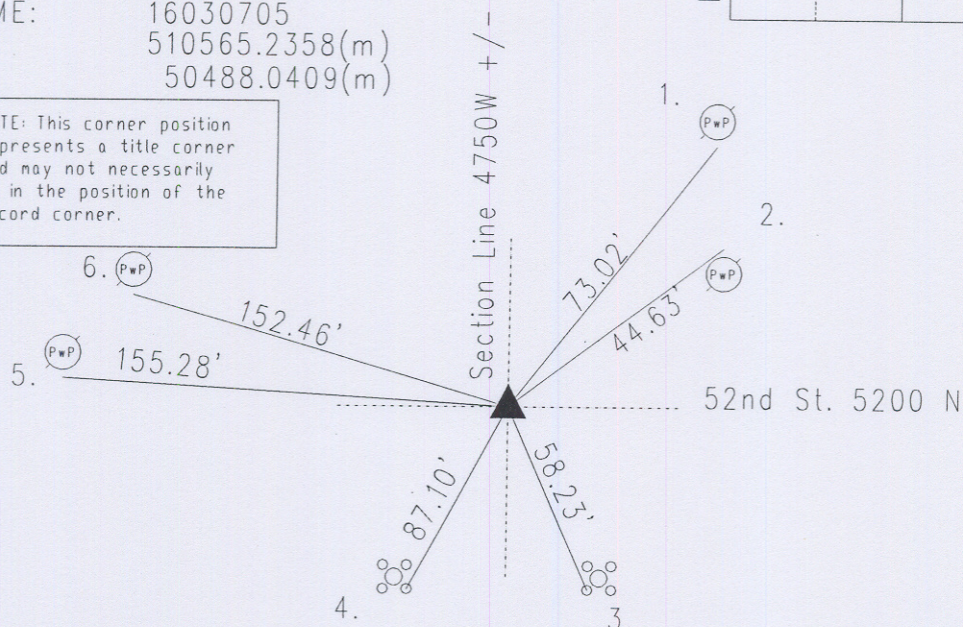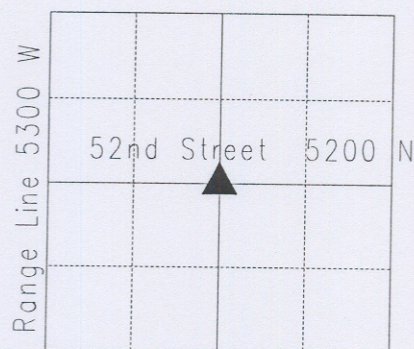

CORNER HISTORY: Center 7-16-3. No reference per Marion County Atlas dated 1883 per page 7. Pike Township Legal Survey Book 6 page 12 dated 12-8-1879 referenced the center dated 11-1-1944 by Paul Brown surveying the NW Quarter of section. Corner reference dated 10-31-1975 by Miller called stone and set a road nail over stone. Corner reference dated 8-14-86 by Miller called road nail over stone. Corner reference dated 7-17-2000 by Wilcoxon dug and found rebar in 2'x2' cut. Corner reference dated 8-29-06 by Wilcoxon called found rebar. Corner reference dated 9-22-08 by Wilcoxon stone 18"x8"x4" found 7" down, set Harrison monument.

16030705

REF.	DISTANCE	DESCRIPTION
1.	73.02'	Mag nail w/brass washer SF PwP#29-327B 4"up
2.	44.63'	Mag nail w/brass washer NW PwP#28-327B 2"up
3.	58.23'	SW bolt of aluminum pole base
4.	87.10'	SF bolt of aluminum pole base
5.	155.28'	Mag nail w/brass washer S PwP#16-326B
6.	152.46'	Mag nail w/brass washer S PwP#233-326B 2"up